

60V、150mA Low Power LDO

SSP7985

General Description

The SSP7985 series is a group of positive voltage output, three-pin regulators, that provide a high current even when the input/output voltage differential is small. Low power consumption and high accuracy is achieved through CMOS and laser trimming technologies.

The SSP7985 consists of a high-precision voltage reference, an error amplification circuit, and a current limited output driver. Transient response to load variations have improved in comparison to the existing series.



Features

- High input voltage: 60V
- Low temperature coefficient
- Built-in current limiter
- High PSRR: 70dB at 1KHz
- Good Transient Response
- Large Output Current: 150mA
- Low Quiescent Current: 2µA
- Output voltage accuracy: tolerance $\pm 2\%$
- Integrated Short-Circuit Protection
- Dropout Voltage: 70mV@10mA/700mV@100mA
- High Input Voltage Rating: Up to 80V
- Packages: SOT89-3, SOT23-3 and SOT23-5

Applications

- Battery-powered equipment
- Smoke detector and sensor
- Home Appliance
- Microcontroller Applications

Order information

Product model	Package	Manner of packing	Packing quantity
SSP7985PxxPR	SOT89-3	Reel	1000
SSP7985PxxMR	SOT23		3000
SSP7985PxxM5R	SOT23-5		3000

Selection Guide Table


SSP7985P①②③④

Designator	Symbol	Description
① ②	Integer	Output Voltage(2.5V~5.0V)
③	P	Package:SOT89-3
	M	Package:SOT23-3
	M5	Package:SOT23-5
④	R	RoHS / Pb Free
	G	Halogen Free




Note: "①②" stands for output voltages. Other voltages can be specially customized.

Part No.	Output Voltage	Package
SSP7985P25XX	2.5V	SOT89-3 SOT23-3 SOT23-5
SSP7985P27XX	2.7V	
SSP7985P30XX	3.0V	
SSP7985P33XX	3.3V	
SSP7985P36XX	3.6V	
SSP7985P40XX	4.0V	
SSP7985P44XX	4.4V	
SSP7985P50XX	5.0V	

Functional Block Diagram

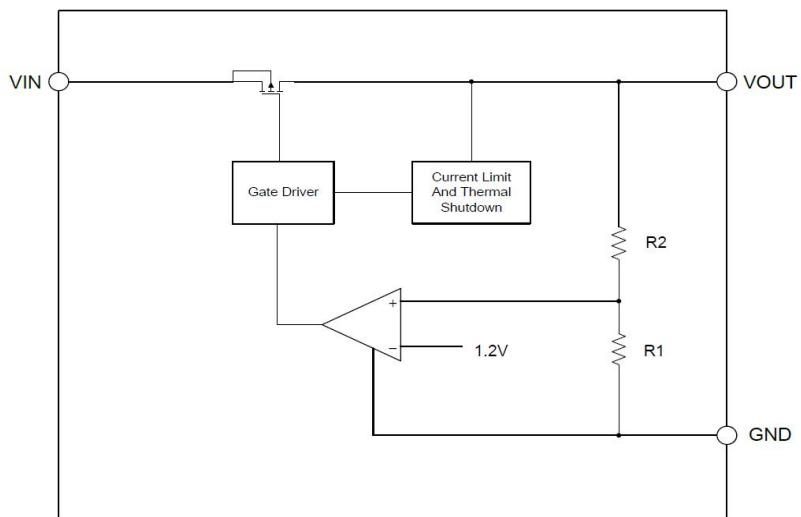

Pin Assignment

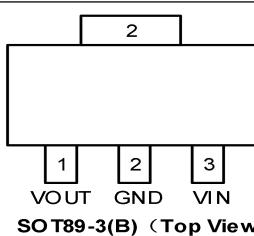SSP7985PxxPx		
NO.	Description	
1	GND	
2	VIN	
3	VOUT	 SOT89-3 (Top View)
SSP7985PxxPBx		
NO.	Description	
1	VOUT	
2	GND	
3	VIN	 SOT89-3(B) (Top View)
SSP7985PxxMx		
NO.	Description	
1	GND	
2	VOUT	
3	VIN	 SOT23-3 (Top View)

SSP7985PxxM5x

NO.	Description			
1	VIN	VIN GND NC NC VOUT	VOUT	NC
2	GND		5	4
3	NC		1	2
4	NC		3	NC
5	VOUT		VIN	GND

SOT23-5 (Top View)

Absolute Maximum Ratings

Parameter	Description	Min	Max	Unit
Voltage	VIN Pin to GND Pin	-0.3	80	V
	VOUT Pin to GND pin	-0.3	6	V
	VOUT Pin to VIN Pin	-35	0.3	V
Current	Peak output	250mA		
Temperature	Operating Ambient Temperature	-40	85	°C
	Storage Temperature	-40	150	°C
	junction temperature, operating	-	150	°C
Thermal Resistance (Junction to Ambient)	SOT89-3	180		
	SOT23-3	380		
	SOT23-5	300		
Power Dissipation	SOT89-3	600		
	SOT23-3	300		
	SOT23-5	400		
Electrostatic discharge rating	Human Body Model (HBM)	4		
	Charged Device Model (MM)	100		

Note:These are just the limit parameters.Beyond the range specified in the Absolute Maximum Ratings may cause serious damage to the equipment.Long exposure to extreme conditions may affect the reliability of the device.


Electrical Characteristics

(At TA=25°C, CIN=1uF, VIN=VOUTNOM+1.0V, COUT=10μF, unless otherwise noted)

Parameter	Symbol	Test Conditions	MIN	TYP	MAX	UNIT
Input Voltage	V _{IN}		5	—	60	V
Quiescent Current	I _{GND}	V _{IN} =12V, No load	—	2	—	μA
Output Voltage	V _{OUT}	V _{IN} =12V, I _{out} =10mA	V _{OUTNOM} * 0.98	V _{OUTNOM}	V _{OUTNOM} *1.02	V
Output Current	I _{OUT_MAX}		—	150	—	mA
Dropout Voltage(1)	V _{DROP}	I _{OUT} =10mA , V _{IN} =V _{OUTNOM} -0.1V	—	70	—	mV
		I _{OUT} =100mA , V _{IN} =V _{OUTNOM} -0.1V	—	700	—	mV
Load Regulation	ΔV _{OUT}	V _{IN} =12V, 1mA≤I _{OUT} ≤100mA	—	20	—	mV
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	I _{OUT} =1mA, V _{OUTNOM} +0.5V≤V _{IN} ≤60V	—	0.01	—	%/V
Current Limit	I _{LIMIT}		—	250	—	mA
Thermal Shutdown Temperature	T _{SHDN}	Shutdown, temperature increasing	—	150	—	°C
		Reset, temperature decreasing	—	140	—	
Power Supply Rejection Ratio	PSRR	V _{IN} =12V , I _{out} =10mA F=1Khz,V _{out} =3.3V	—	70	—	dB


Note:(1)Dropout Voltage is the voltage difference between the input and the output at which the output voltage drops 2% below its nominal value.

Application Circuits

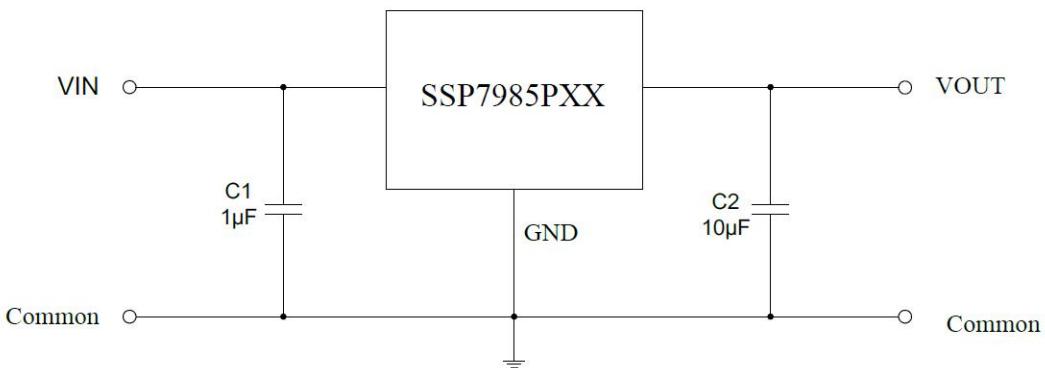


Package Information

3-pin SOT89 Outline Dimensions

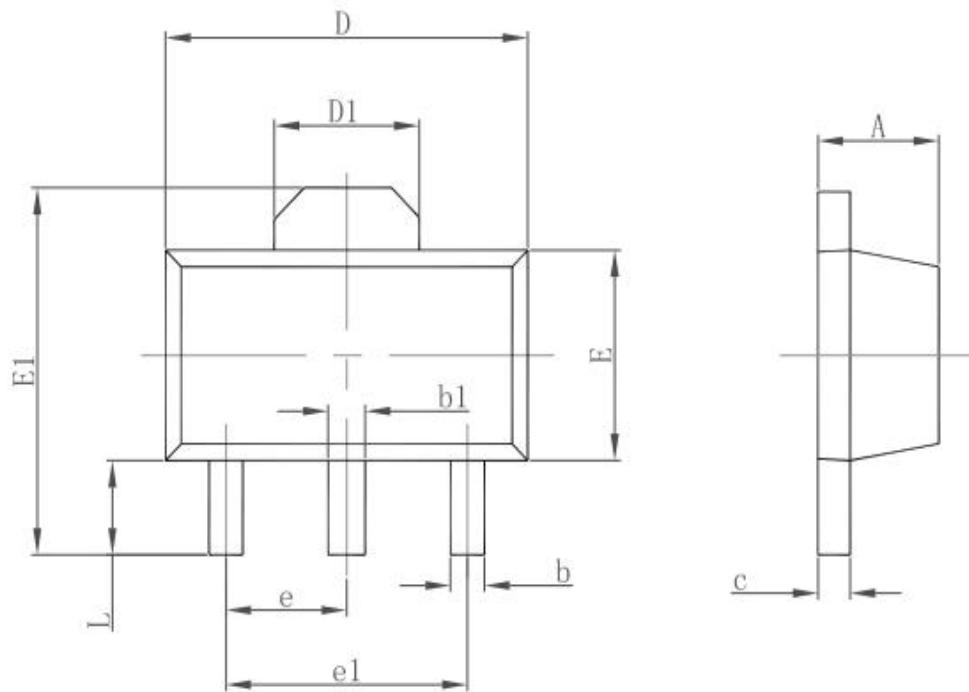


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF		0.061 REF	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP		0.060 TYP	
e1	3.000 TYP		0.118 TYP	
L	0.900	1.200	0.035	0.047

3-pin SOT23-3 Outline Dimensions

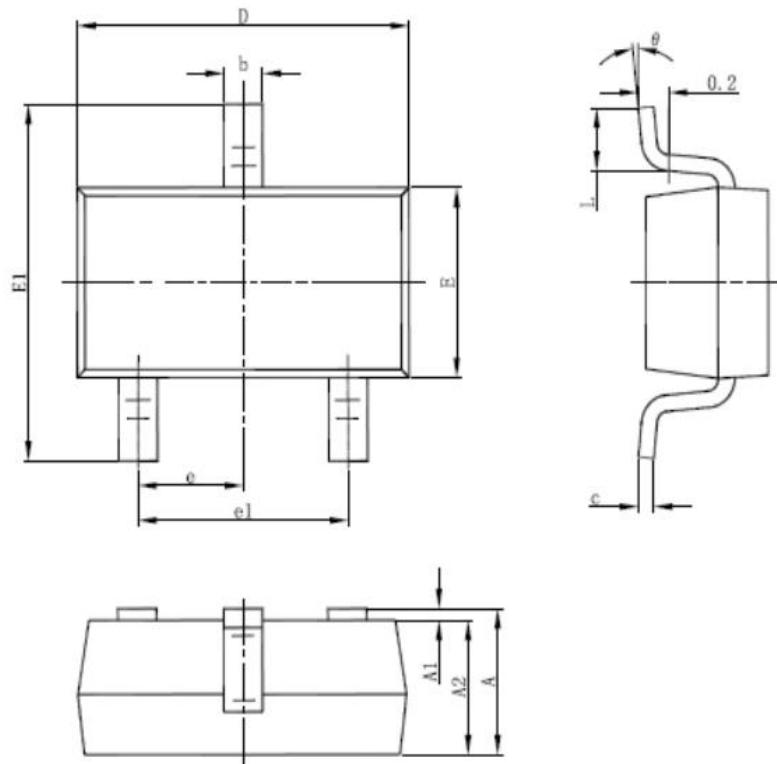

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

SOT23-5 Outline Dimensions

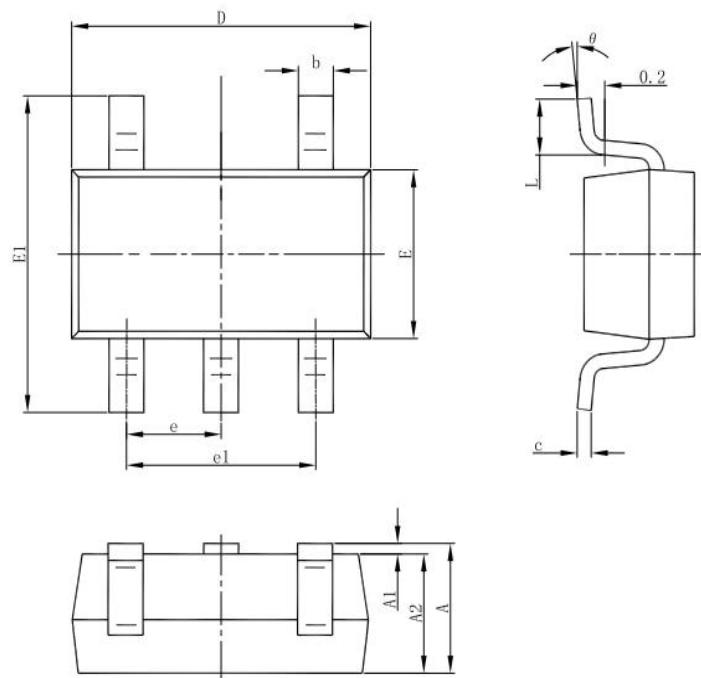

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

Special Version

The company reserves the right of final interpretation of this specification.

Version Change Description

Versions: V1.2	Writer: Si Yuan Wu	Time: 2021.10.29
Modify the record: 1. Re-typesetting the manual and checking some data		
Versions: V1.3	Writer: Yang	Time: 2023.6.8
Modify the record: 1.Add the SOT89-3(B) package pin diagram		

The statement

The information in the usage specification is correct at the time of publication, Shanghai Siproin Microelectronics Co. has the right to change and interpret the specification, and reserves the right to modify the product without prior notice. Users can obtain the latest version information from our official website or other effective channels before confirmation, and verify whether the relevant information is complete and up to date.

With any semiconductor product, there is a certain possibility of failure or failure under certain conditions. The buyer is responsible for complying with safety standards and taking safety measures when using the product for system design and complete machine manufacturing. The product is not authorized to be used as a critical component in life-saving or life-sustaining products or systems, in order to avoid potential failure risks that may cause personal injury or property loss.